

CHEMTRONICS

Technical Data Sheet

TDS # 1605

Pow-R-Wash[®] PR

PRODUCT DESCRIPTION

Pow-R-Wash[®] PR is a plastics safe contact cleaner that removes oxides and other soils on de-energized equipment. Engineered with very low surface tension, this high pressure aerosol formulation flushes areas clean and evaporates instantly leaving no residue.

- Removes oxides, dust, dirt, and grime from contact areas
- Penetrates hard to reach areas
- Evaporates quickly
- Leaves no residues
- Has low odor
- Noncorrosive
- Contains no CFCs, HCFCs or 1,1,1 Trichloroethane
- Contains no Chlorinated Solvents

TYPICAL APPLICATIONS

Pow-R-Wash[®] PR removes oxidation and other soils from:

- Printed Circuit Boards
- Relays and Contacts
- Fuse Boxes
- Rheostats and Potentiometers
- Terminals
- Timers
- Selector Switches

TYPICAL PRODUCT DATA AND PHYSICAL PROPERTIES

Boiling Point	141°F Initial
Dielectric Breakdown (ASTM-D877)	44 kV
Flash Point (TCC)	-20.0°F
Appearance	Clear, Colorless Liquid
Odor	Mild Ethereal
Solubility in Water	Negligible
Specific Gravity (water = 1 @ 68°F)	0.67
Evaporation Rate (butyl acetate=1)	< 1
Surface Tension (dynes/cm @ 21.6°C)	18.3
Kauri-Butanol (KB) Number	50
Shelflife	5 years

COMPATIBILITY

Pow-R-Wash[®] PR is generally compatible with most materials used in printed circuit board fabrication, except acrylics, ABS resins, polycarbonates and polystyrenes. As with any cleaning agent solvent/component compatibility must be determined on a non-critical area prior to use.

<u>Material</u>	<u>Compatibility</u>
ABS	Non-Compatible
Buna-N	Fair

EPDM	Fair
Graphite	Excellent
HDPE	Excellent
LDPE	Good
Lexan™	Fair
Neoprene	Fair
Noryl®	Poor
Nylon™ 66	Excellent
Cross-Linked PE	Excellent
Polypropylene	Excellent
Polystyrene	Non-Compatible
PVC	Excellent
Silicone Rubber	Poor
Teflon™	Excellent
Viton™	Fair

Chemtronics provides a technical hotline to answer your technical and application related questions. The toll free number is: **1-800-TECH-401**.

ENVIRONMENTAL IMPACT DATA

ENVIRONMENTAL IMPACT DATA			
CFC	0.0%	VOC	100.0%
HCFC	0.0%	HFC	0.0%
CL Solv.	0.0%	ODP	0.00

CFC, HCFC, CL. SOLV., VOC, and HFC numbers shown are the content by weight. Ozone depletion potential (ODP) is determined in accordance with the Montreal Protocol and U.S. Clean Air Act of 1990. The ODP of this product is 0.0. It is the sum of the ODP of the substances that may contribute to the depletion of stratospheric ozone, based upon the weight of each substance in the product's formulation.

NOTE: This information is believed to be accurate. It is intended for professional end users having the skills to evaluate and use the data properly. CHEMTRONICS does not guarantee the accuracy of the data and assumes no liability in connection with damages incurred while using it.


CHEMTRONICS
8125 COBB CENTER DRIVE
KENNESAW, GA 30152

1-770-424-4888

REV. D (08/13)

COMPETITIVE ASSESSMENT

Milligrams of Lithium Greased Removed Per 7 Second Spray

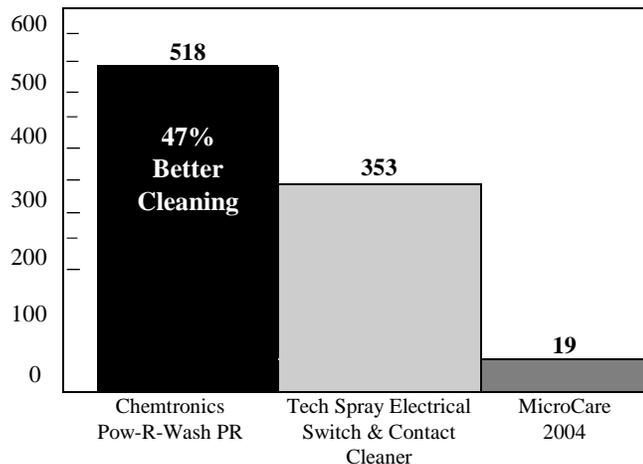

USAGE INSTRUCTIONS

For commercial use only.

Read MSDS carefully prior to use.

Spray 4 to 6 inches from surface to clean. Wash parts from top to bottom, allowing the liquid to flush away dirt and dissolved grease. For precise application use attached extension tube. Flammable-Do Not use near sources of ignition or energized equipment.

AVAILABILITY

ES1605 10 oz. Aerosol

TECHNICAL & APPLICATION ASSISTANCE

DISTRIBUTED BY: